



mb air systems ltd



# Contact-Cooled Rotary Screw Air Compressors

R-Series 55-75 kW



# A New Level of Reliability, Efficiency and Productivity

Ingersoll Rand R-Series rotary screw air compressors offer the very best of time-proven designs and technologies with new, advanced features to ensure the highest levels of reliability, efficiency and productivity available.



Xe-145M option shown

## Progressive Adaptive Control™ (PAC™) Protection

Continuously monitors key operating parameters and adapts to prevent unexpected downtime.

- Increases uptime by scanning and adjusting operating parameters in response to changes in filter condition
- Ensures peak performance with real-time electronic maintenance indicators
- Optimises energy consumption and reduces noise by adjusting fan speed
- Improves productivity by proactively monitoring and conditioning incoming power

## V-Shield™ Technology

Leak-free design with stainless steel pipes and long-life metal-flex hoses.

- Repeatable leak-free connections using superior elastomeric seals
- Reduces downstream contamination with stainless steel air piping
- Extends compressor life and reduces noise via vibration isolation system and metal-flex hoses

## Xe-Series Controller

Features an intuitive high resolution colour display with web access.

- Remote access and control using web-enabled communications with a standard web browser
- Achieves system optimisation through built-in performance analysis and trending
- Clear and intuitive compressor controls with high intensity LED indicators and large navigation buttons
- Increases efficiency and stabilizes pressure by sequencing up to 4 Xe-controlled compressors without additional hardware

## Sequential Cooling System

Significantly improves efficiency, serviceability and noise level.

- Reduces thermal stress and extends life using independently-mounted, free-floating heat exchangers
- Reduces the energy required to remove harmful condensate in downstream air by significantly lowering discharge temperatures
- Lowers energy consumption and noise with an energy-efficient centrifugal blower



Total Air System integrated dryer option shown

## Total Air System (TAS)

Clean, dry air in a single package that minimises installation costs and space.

- Protects downstream equipment with:
  - Integrated refrigerated dryer that provides dew point suppression up to 46°C (115°F) ambient temperature and 40% relative humidity
  - Standard high efficiency coalescing filter that delivers ISO Class 1-4-2 quality air
- Increases reliability and efficiency with a lower pressure drop than typical dryers and patented 3-in-1 heat exchanger
- Reduces service time and cost with single-point maintenance and monitoring
- Prevents unplanned shutdowns with PAC™ Protection by adjusting operating parameters in response to changes in filter condition



# mb air systems ltd

of performance and value that best fits your specific needs. At Ingersoll Rand, it's all about value...and choice!

## Nirvana VSD EFFICIENCY

Variable speed with single-stage airoend



Fixed speed with single-stage airoend

## Total Air System

Optimised dryer, filtration system and compressor in one convenient package.



# Innovative Design, Flexible Choice



mb air systems Ltd

## Time-Proven Reliable Airends



### Robust Airends

Used in compressors worldwide, Ingersoll Rand single-stage airends are both reliable and efficient.

- Precision machined rotors
- Highest quality tapered roller bearings
- Integrated coolant flow to eliminate leak paths

### Energy Recovery System (ERS)

The Ingersoll Rand Energy Recovery System (ERS) provides a cost-effective way to reduce your energy bills and benefit the environment by capturing compressor heat and putting it to work.

- Supplements current water heating system
- Ensures years of trouble-free operation with corrosion resistant material



## n Efficiency for Variable Demand

### Nirvana Variable Speed Drive (VSD) Compressors

Ingersoll Rand VSD compressors feature the highest efficiency Hybrid Permanent Magnet (HPM) motor.

- Unlimited start/stops and shut off to conserve energy
- Rated for continuous duty — 100% load, 24/7, 46°C (115°F)
- Stable, constant pressure control
- Virtually no degradation in specific power at partial load
- Stable power factor over control range



Maintenance-free, bearingless motor design

Fewer rotating parts — no pulleys, belts or couplings to wear out

## i Efficiency for Constant Demand

### Fixed Speed Compressors

Ingersoll Rand R-Series fixed speed compressors are the most reliable and energy-efficient solution for processes with constant demand.

- Class F insulation B temperature rise
- IE3 supreme efficiency class motors
- Compressors can be outfitted for continuous and reliable operation in harsh conditions, even outdoors in rain and dust, from -10°C (14°F) up to 55°C (131°F)
- IP65/NEMA 4 electric panels



Continuous duty high-performance TEFC induction motor

Standard Features					
Category	Description				
<b>Airend</b>	Time-proven design				
<b>PAC™ Protection</b>	Scans and reports faults				
	Real-time energy monitoring				
	Blower speed compensation to ambient temperature				
	Automatic coolant temperature control to eliminate moisture build-up		•		
<b>Cooling System</b>	Integrated line reactor in compliance with industrial EMC standards		•		
	Air-cooled sequential cooling system optimised for efficiency & serviceability	•	•		
	Energy-efficient and low noise centrifugal blower	•	•		
	Generous package cooling system rated for 46°C (115°F) ambient	•	•		
	Moisture separator	•	•		
	Electronic no-loss condensate drains	○	•		
<b>V-Shield™ Technology</b>	Stainless steel air piping	•	•		
	Vibration isolation pads and premium metal-flex hoses	•	•		
	Repeatable leak-free connections with superior elastomeric seals	•	•		
<b>Services</b>	Ergonomic swing-out lid on the separator tank	•	•		
	Simple ducting (single air inlet and single air outlet)	•	•		
	12-month full package warranty	•	•		
<b>Auxiliary Systems</b>	Noise attenuation enclosure	•	•		
	Package pre-filtration	•	•		
	Long-life filtration and separation elements	•	•		
	Extended life Ingersoll Rand premium grade coolant	•	•		
	Flow control by variable speed technology		•		
	Flow control by full load/no load regulation system	•			
<b>Motors &amp; Electrical Systems</b>	Control panel protection, IP65/NEMA 4 electrics	•			
	Star-delta reduced voltage starter	•			
	High-efficiency TEFC IP55 motors - Class F insulation with B rise	•			
	Hybrid Permanent Magnet (HPM) motor – EMC-compliant		•		
	Control panel protection, IP65/NEMA 12		•		
	Variable speed drive on main motor & centrifugal blower motor		•		
<b>Optional Features</b>					
<b>Total Air System (TAS)</b>	Single point maintenance and monitoring				
	High efficiency pre-filter	○	○		
	3-in-1 heat exchanger				
	ISO Class 1-4-2 ISO quality air delivered				
<b>Weather Protection</b>	Outdoor modification/rain protection†	○			
	Frost Protection to -10°C (14°F)†	○			
	High ambient protection up to 55°C†	○			
	Premium high dust filtration	○			
	Motor space heater	○			
	Water cooling	○	○		
	Sea water and harsh water cooling	○	○		
<b>Environmental</b>	Energy Recovery System (ERS)	○	○		
	Fluid containment system	○	○		
	Food grade coolant and filtration system	○	○		
<b>Power Protection</b>	Power Outage Restart Option (PORO)	○	○		
	Safety switch disconnects	○	○		
	Phase monitor (protection)	○	•		
	Electronic solid state reduced voltage starter	○			
<b>General Options</b>	Flow control by inlet modulation control	○			
	Comprehensive service and coverage plan	○	○		
<b>Xe-Series Controllers</b>		Xe-90M (Standard)		Xe-145M (Optional)	
		Fixed Speed	Nirvana VSD	Fixed Speed	Nirvana VSD
<b>Description</b>		i	n	i	n
Built-in energy savings calculator			•		•
On controller graphing and trending				•	•
Standard Web pages		•	•	•	•
Remote control via Web pages		•	•	•	•
Automated reporting				•	•
Web-based graphing and trending				•	•
Email notification of warnings and trips				•	•
Built-in sequencer for up to 4 units		•	•	•	•
Direct communications with Xi system controls		•	•	•	•

• Standard Feature ○ Optional Feature "Blank" Not Available †Not available on Total Air System (TAS) model



Ingersoll Rand

mb air systems ltd

**n Ingersoll Rand Nirvana Standard – 50 Hz Performance**

Model	Max. Pressure bar g	Max. Pressure psig	Nominal Power kW	Nominal Power hp	Capacity (FAD)** m <sup>3</sup> /min	Capacity (FAD)** cfm	Dimensions (Length x Width x Height) mm	Weight (Air-cooled) kg
R55n	4.5-10.0	65-145	55	75	3.23-10.53	114-372	2432 x 1265 x 2032	1,420
R75n	4.5-10.0	65-145	75	100	3.23-13.56	114-479	2432 x 1265 x 2032	1,420

**n Ingersoll Rand Nirvana<sup>†</sup> Total Air System (TAS) – 50 Hz Performance**

R55n TAS	4.5-9.5	65-135	55	75	3.23-10.11	114-357	2432 x 1265 x 2032	1,570
R75n TAS	4.5-9.5	65-135	75	100	3.23-12.94	114-457	2432 x 1265 x 2032	1,570

**i Ingersoll Rand Standard – 50 Hz Performance**

Model	Max. Pressure bar g	Max. Pressure psig	Nominal Power kW	Nominal Power hp	Capacity (FAD)* m <sup>3</sup> /min	Capacity (FAD)* cfm	Dimensions (Length x Width x Height) mm	Weight (Air-cooled) kg
R55i	7.5	110	55	75	10.19	360	2432 x 1265 x 2032	1,603
	8.5	125	55	75	9.43	333	2432 x 1265 x 2032	1,603
	10.0	145	55	75	8.58	303	2432 x 1265 x 2032	1,603
	14.0	200	55	75	6.51	230	2432 x 1265 x 2032	1,603
R75i	7.5	110	75	100	13.34	471	2432 x 1265 x 2032	1,718
	8.5	125	75	100	12.77	451	2432 x 1265 x 2032	1,718
	10.0	145	75	100	11.61	410	2432 x 1265 x 2032	1,718
	14.0	200	75	100	8.83	312	2432 x 1265 x 2032	1,718

**i Ingersoll Rand<sup>†</sup> Total Air System (TAS) – 50 Hz Performance**

R55i TAS	7.0	103	55	75	10.19	360	2432 x 1265 x 2032	1,753
	8.0	118	55	75	9.43	333	2432 x 1265 x 2032	1,753
	9.5	138	55	75	8.58	303	2432 x 1265 x 2032	1,753
	13.5	193	55	75	6.51	230	2432 x 1265 x 2032	1,603
R75i TAS	7.0	103	75	100	13.34	471	2432 x 1265 x 2032	1,868
	8.0	118	75	100	12.77	451	2432 x 1265 x 2032	1,868
	9.5	138	75	100	11.61	410	2432 x 1265 x 2032	1,868
	13.5	193	75	100	8.83	312	2432 x 1265 x 2032	1,868

\*FAD (Free Air Delivery) is full package performance including all losses. Tested per ISO 1217:2009 Annex C and is measured at 0.5 bar g/10 psig lower than maximum pressure on non-TAS units and at maximum pressure on TAS-equipped units.

\*\*FAD (Free Air Delivery) is full package performance including all losses. Tested per ISO 1217:2009 Annex C and capacity range is measured at 7 bar g/100 psig.

<sup>†</sup>TAS units deliver ISO Class 1-4-2 quality air measured at steady state conditions in accordance with ISO 8573-1:2001 that dictates inlet air to package of 25°C and relative humidity of 60%.




To keep your systems running at maximum efficiency 24 hours a day, 7 days a week, Ingersoll Rand designed UltraCare, a five-year all-in-one maintenance program for rotary compressors and air dryers.

- 5-year warranty
- One price covers all, there are no hidden extras
- Energy savings through efficient operation
- Minimised risk of breakdown
- Fixed costs over five years
- Extendable contract

Visit [www.ingersollrandproducts.com/ultracare](http://www.ingersollrandproducts.com/ultracare) or contact your Ingersoll Rand distributor to learn more.

**Count on Ingersoll Rand for All Your Air System Requirements**

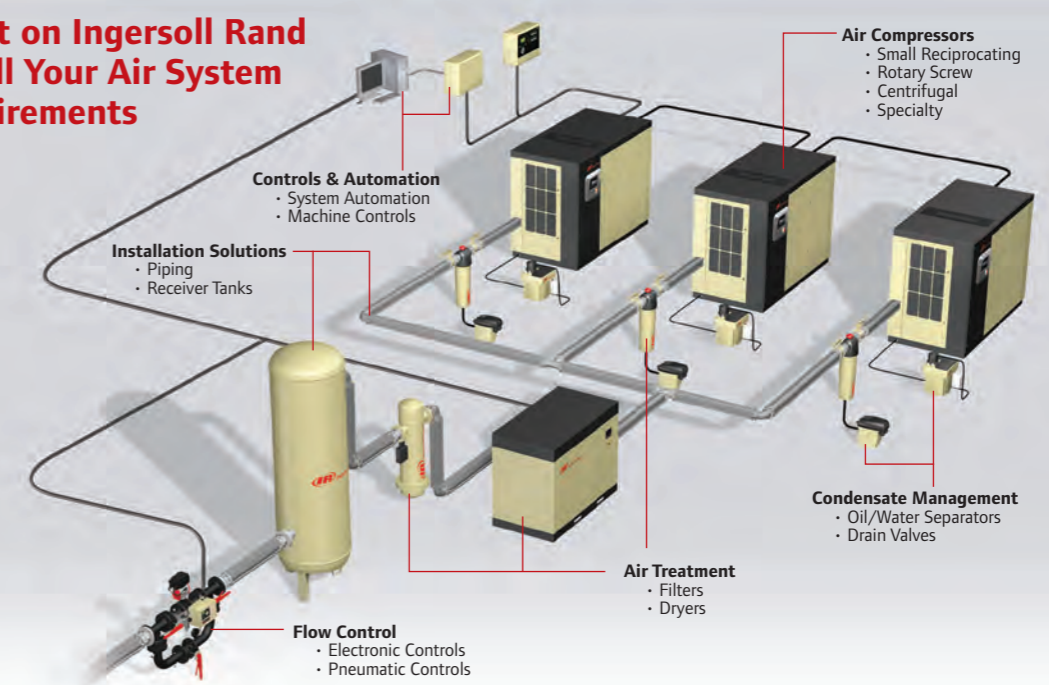



mb air systems ltd

**Company Directory:**

149 Glasgow Road  
Wishaw  
Lanarkshire  
ML2 7QJ  
Tel 01698 355711  
Fax 01698 359299

Wellheads Road  
Farburn Industrial Estate  
Dyce, Aberdeen  
AB21 7HG  
Tel 01224 723434  
Fax 01224 723545

Fleming Close  
Segensworth East  
Fareham  
Hampshire  
PO15 5SB  
Tel 01489 588398  
Fax 01489 588381

8 Burford Way  
Boldon Business Park  
Boldon  
Tyne & Wear  
NE35 9PZ  
Tel 0191 519 5500  
Fax 0191 537 1105

E-mail [sales@mbairsystems.co.uk](mailto:sales@mbairsystems.co.uk)  
[www.mbairsystems.co.uk](http://www.mbairsystems.co.uk)  
[www.airwinch.co.uk](http://www.airwinch.co.uk)



engineering solutions

design product finishing pneumatics & tools  
compressed air service  
offshore lifting